


JANOME

MY|LOCK 744D


*Free-arm & Flatbed convertible
overlock machine.*




- 2, 3 or 4 thread overlocking
- Uses standard ball point needles
- Seam length 1 - 5mm
- Seam widths 3.3mm (narrow) 7.5mm (wide) 2.0mm (rolled hem)
- Differential feed ratio 0.5 - 2.2
- Retractable upper knife
- Colour coded threading
- Snap on feet

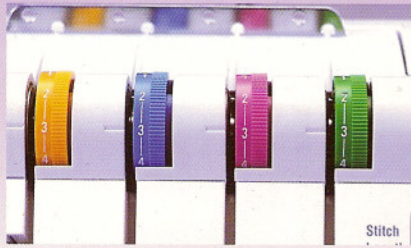


Lay-in thread tension dial
The concealed threading path ensures easy to follow threading and stable sewing results.

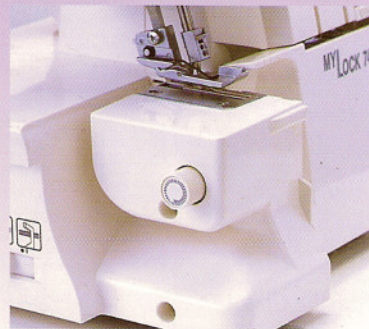


Free arm & flat bed convertible
Choose from free arm or flat bed setups.

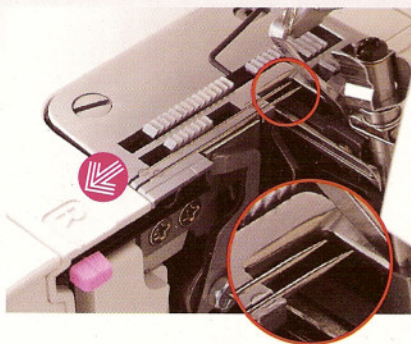



Easy rolled hem change-over
No need to change the needle plate for rolled hemming. Just slide the needle plate setting knob to the "R" position to switch the chaining finger to that for rolled hemming.

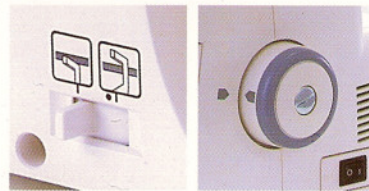

Retractable upper knife
The upper knife retracts easily for decorative sewing.





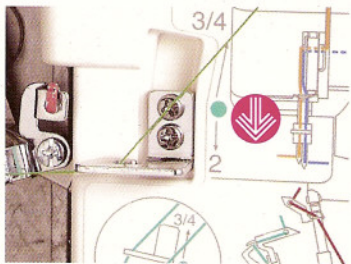
















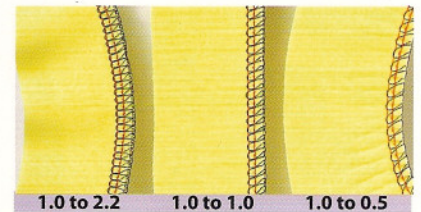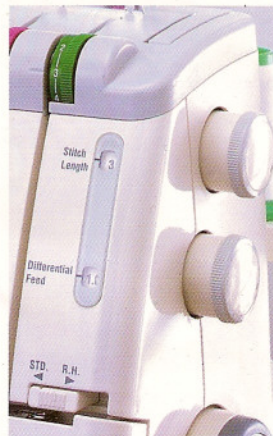


2-thread serging
2-thread serging works well for the rolled hem stitch with thick thread, flat lock stitch, and when overlock stitching stretch materials.



Range of differential feed ratio
Setting the differential feed dial between 1.0 and 2.2 prevents stretched edges on knit fabrics. Setting the differential feed dial between 0.5 and 1.0 prevents puckered edges on fine woven fabrics.

OPTIONAL ATTACHMENTS

						
4 Thread overlock	3 Thread overlock (Narrow)	3 Thread overlock (Wide)	Rolled hem	Narrow hem	Picot edge	Decorative overedge

Janome UK Ltd,
Southside,
Bredbury,
Stockport, SK6 2SP,
Telephone: 0161 666 6011
Fax: 0161 494 0179
www.janome.co.uk

Your local stockist